

## Cladding Power Stripper

### Product Features

- High Power Transfer Efficiency
- Wavelength Insensitivity
- High Strip Efficiency

### Product Applications

- Fiber Laser
- Fiber Amplifier

### Specifications


#### Parameter

Input & Output Fiber	Working Wavelength (nm)	Signal IL (dB)	Strip Efficiency (dB)	Strip Power (W)
6/125 DC	1020~1080	≤0.3	20	≤50, ≤100
8/125 DC	1525~1570	≤0.3	20	≤50, ≤100
10/125 DC	1020~1080	≤0.3	20	≤50, ≤100
12/125 DC	1020~1080	≤0.3	20	≤50, ≤100
15/125 DC	1020~1080	≤0.3	20	≤50, ≤100
20/125 DC	1020~1080	≤0.3	20	≤50, ≤100
20/200 DC	1020~1080	≤0.3	20	≤50, ≤100
25/250 DC	1020~1080	≤0.3	20	≤50, ≤100
30/250 DC	1020~1080	≤0.3	20	≤50, ≤100
25/300 DC	1525~1570	≤0.3	17	≤50, ≤100
20/400 DC	1020~1080	≤0.3	17	≤50, ≤100
PM 6/125 DC	1020~1080	≤0.3 (ER≥18)	20	≤50, ≤100
PM 12/125 DC	1020~1080	≤0.3 (ER≥18)	20	≤50, ≤100
PM 15/125 DC	1020~1080	≤0.3 (ER≥18)	20	≤50, ≤100
PM 20/125 DC	1020~1080	≤0.3 (ER≥18)	20	≤50, ≤100
PM 25/250 DC	1020~1080	≤0.3 (ER≥18)	20	≤50, ≤100
PM 30/250 DC	1020~1080	≤0.3 (ER≥18)	20	≤50, ≤100
PM 20/400 DC	1020~1080	≤0.3 (ER≥18)	17	≤50, ≤100
Package (mm)	70x12x8, 100x15x10			
Operating Temperature	-5~65			
Storage Temperature	-40~85			

## Package Dimension



for  $\leq 50W$

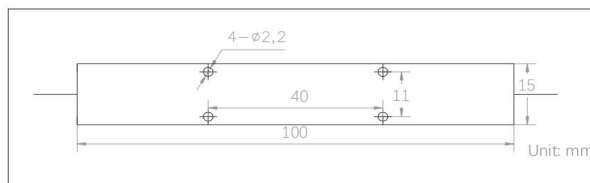

for  $\leq 100W$

## Ordering Information

1	Fiber Type	6/125 DC; 8/125 DC; ...; PM 20/400 DC;
2	Power Handling	5W; 10W; 20W; 50W; 100W;
3	Fiber Length	1=1m;
4	Package	70x12x8; 100x15x10;